

### **PRODUCT DATA SHEET**



Left: Standard M150 grout pump and 150 litre mixer which includes the Eagle Mk2 air powered mixer motor with on board lubricator.

### 01GP CLARK GROUT PUMPS & MIXERS

The pneumatic range of Clark Grout Pump and Mixers have been used in coal mining and civil construction applications for more than twenty years. The grout pump can be utilized for various applications. These include: pressure injection of cable bolts for roof and strata support; void filling of strata, either to atmosphere or injected with the Clark grout packer; spraying of ventilation stoppings in coal mines; spraying concrete on pylons and bridge repairs and also slab jacking.

The grout pump options can be used in combination with the Clark Grout Mixers. Two different capacity mixers are available. The 150 litre capacity mixer is the most common size for easy handling in confined areas. For larger mixes, the 500 litre capacity mixers yield around 300 litres of grout per batch and have been used in many civil construction applications such as the strengthening of Sydney Airport runway.

For underground coal applications such as cable bolting using Stratabinder or similar type grout, the M150 with the Mk2 mixer is recommended.

For thicker grouts such as thixotropic grouts, the M150 with a thixotropic mixer is preferred.

#### **APPLICATIONS**

- Cable bolting
- Spraying
- Void filling
- Slab jacking

### **Associated Clark products:**

- Grout spray gun
- Drill rig
- Eagle Rib drill
- Grout packer
- Grout and air hose
- Lubricator

#### **Options:**

- 150 or 500 litre capacities
- Thixotropic bowl or flat bottom
- Standard or high torque mixer
- Standard flow or high flow pump

Ph: +612 4272 8311 Fx: +612 4272 8533 30 Waverley Drive Unanderra NSW 2526 sales@clarksminingservices.com.au





### **PRODUCT DATA SHEET**

## **GROUT PUMP SPECIFICATIONS**

	M150P	M150	M150EQ	D150
Motor Piston Ømm	150	150	150	150
Weight kg	16.6	17	19	18
Length mm	1056	1090	1095	1156
Maximum Flow I/min	20	60	110	60
Maximum discharge Pressure kPa	5100	3500	1900	3500
Maximum air supply m3/h	50	50	50	50
Discharge Port mm BSP	25	25	40	25




Ph: +612 4272 8311 Fx: +612 4272 8533 30 Waverley Drive Unanderra NSW 2526 sales@clarksminingservices.com.au






### **PRODUCT DATA SHEET**

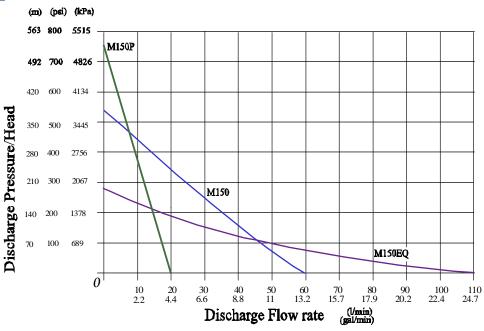

M150, D150 & M150EQ Grout pump performance at 689 kPa air pressure, pumping water.

M150P Grout pump performance at 600kPa air pressure pumping water

### **MIXERS**

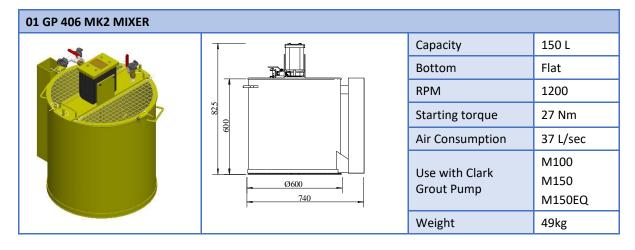

Ph: +612 4272 8311 Fx: +612 4272 8533 30 Waverley Drive Unanderra NSW 2526 sales@clarksminingservices.com.au





### **PRODUCT DATA SHEET**

#### 01 GP 407 MK2 THIXO MIXER Capacity 150 L **Bottom** Flat RPM 260 Starting torque 279 Nm 501 Nm Air Consumption M100 M150 Use with Clark Ø600 **Grout Pump** M150EQ M150P Weight 4kg 01 GP 490 THIXO MIXER Capacity 150 L **Bottom** Dome RPM 600 Starting torque 225 Nm Air Consumption 120 L/sec M100 Use with Clark M150 **Grout Pump** M150EQ Ø600 745 Weight 62 kg 01 GP 900 THIXO MIXER Capacity 500 L **Bottom** Dome RPM 600 Starting torque 225 Nm 120 L/sec Air Consumption M100 Use with Clark M150 **Grout Pump** M150EQ Weight 80 kg

Ph: +612 4272 8311 Fx: +612 4272 8533 30 Waverley Drive Unanderra NSW 2526 sales@clarksminingservices.com.au





### **PRODUCT DATA SHEET**

## **ACCESSORIES**

	Part No.	DETAILS
Air line lubricator	05 MIN 20	Adjustable jet Steel body 1.25 litre capacity
Hose Assembly Air and Delivery	24HG002 24HG007 24HG011	FRAS Air Hose 20m, 20bar (300psi) FRAS Air Hose 1m, 20bar (300psi) FRAS Air/Water Hose 20m, 35bar (525psi)
Filter Discs	06AL00	Fits inside air hose coupling to filter out dirt
Safety Clips	05MIN49	Used to retain snap couplings on hoses

Ph: +612 4272 8311
Fx: +612 4272 8533
30 Waverley Drive
Unanderra NSW 2526
sales@clarksminingservices.com.au

